



NOTE: STAMP DATE ONTO INSIDE BOTTOM SURFACE OF ITEM 10 HOUSING ASSEMBLY USING BLACK PERMANENT INK.

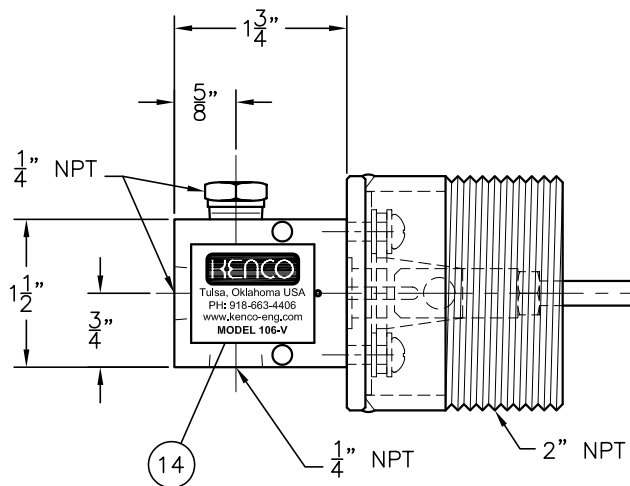

WETTED PARTS:
18-8/302/303/304 STAINLESS STEEL
VITON
ALUMINUM

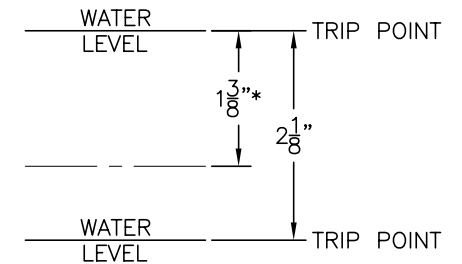

* THIS DIMENSION WILL BE BELOW CENTER LINE IF SWITCH OR ENTIRE ASSEMBLY IS ROTATED 180°. TRIP DIMENSIONS ARE BASED ON TESTS WITH WATER. TRIP POINTS MAY VARY WITH LIQUIDS OTHER THAN WATER.

ASSEMBLY NOTES:

- ITEMS 2 AND 3 TO BE ASSEMBLED WITH LOCTITE 242 OR EQUIVALENT.
- ITEMS 6 AND 7 TO BE ASSEMBLED WITH LOCTITE 242 OR EQUIVALENT.
- LUBRICATE ITEM 13 WITH SAE 30 WT. OIL PRIOR TO INSTALLATION.

REV.	DATE	BY	ECN	EXPLANATION:

INFORMATION IS PROPRIETARY TO KENCO ENGINEERING CO.

TOLERANCES UNLESS OTHERWISE SPECIFIED
DECIMAL: ±.005" FRACTIONAL: ±1/64" ANGULAR: ±1/2°

KENCO ENGINEERING COMPANY
TULSA, OKLAHOMA

SWITCH, PNEUMATIC FLOAT

DATE: 10-07-08 SHEET: 1 OF 1 DRAWING NUMBER
DRN. BY: DPS/DM CHKD. BY: RDM
SCALE: 1"=1" REVISION: C-106-V