


RELIEF PRESSURE ADJUSTMENT RANGE: 0 TO 150 PSI
 RELIEF PRESSURE FACTORY SETTING: 50 PSI

WETTED MATERIALS:
 BODY: 316 STAINLESS STEEL
 DIAPHRAGM: TEFLON (WETTED)/EPDM (NON-WETTED)

NON-WETTED MATERIALS:
 SPRING CASE: PVC
 RELIEF PRESSURE ADJUSTING SCREW: PVC
 SPRING: ZINC PLATED SPRING STEEL
 SCREWS & WASHERS: 18-8 STAINLESS STEEL

MODEL NUMBER:
 KBPV-T-50-S6-P-TE (THREADED CONNECTIONS)
 KBPV-S-50-S6-P-TE (SOCKET WELD CONNECTIONS)

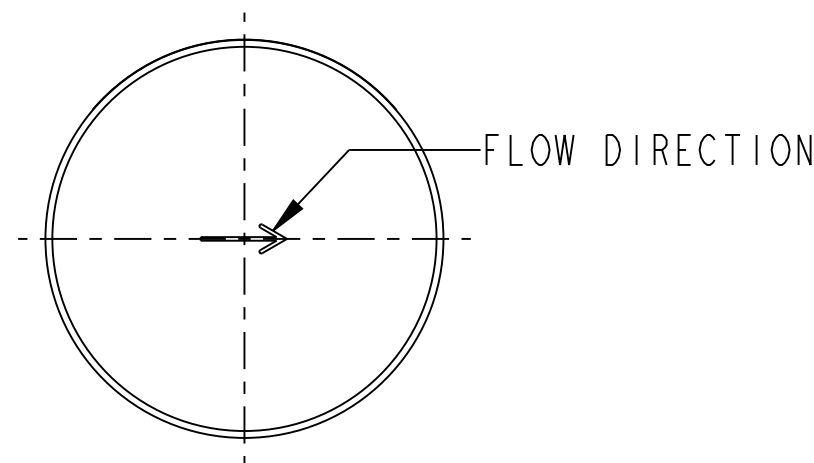

D	5/19/15	LR	REVISED DESIGN TO KENCO STANDARDS WITH NEW	DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.	 Tulsa, Oklahoma USA	MATERIAL:	NOTED
	N/A	BRC	TAPERED SPRING CASE, MODEL NO. SYSTEM AND TAG.			RELEASE LEVEL:	RELEASED
C	01/13/10	KLM	REVISED VIEWS, NOTES AND TABLE	ANGULAR ±1/2° FRACTIONAL ±1/64" (X.X) ±0.015" (X.XX) ±0.010" (X.XXX) ±0.005" MACH FILLET RAD: .031" 125 MAX. FINISH, ALL MACHINED SURFACES.	TITLE: VALVE, KBPV RELIEF, 1/2"	DRAWING CREATED IN PRO/ENGINEER	
	N/A	KI				DRN. BY: PMM	SCALE: 0.600
REV.	DATE	DRN.	DESCRIPTION	CHKD. BY: -	REVISION: D		
	ECN	CHKD.		DATE: 5/19/15	SHEET 1 OF 3		

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.