



Application Data Sheet Ultrasonic Point Switch

PO Box 470426 • Tulsa, OK 74147
Phone: (918) 663-4406
Fax: (918) 663-4480
info@kenco-eng.com

1. Company: _____ Contact: _____ Title: _____
 Street: _____ City: _____ State: _____ Zip Code: _____
 Country: _____ Phone #: _____ Fax #: _____
 E-Mail: _____ # of Units: _____ Expected Delivery: _____

2. Process Media(s): _____

3. Temperature: *Process*: _____ °F max; _____ °F min *Ambient*: _____ °F max; _____ °F min

4. Pressure: _____ (psig) max; _____ (psig) min 5. Any Bubbles or Suspended Solids in Fluid: Yes / No
(circle one)

6. Media Buildup / Coating: Yes / No; If yes, thickness on sensor: _____ in.
(circle one)

7. Sensor Type: Tip-Style Gap Style

8. Input Power: 115Vac 230Vac 24Vdc
 12Vdc 24Vdc Loop

9. Output: Relay 4mA (Dry), 20mA (Wet)
 20mA (Dry), 4mA (Wet)

10. Sensor Material: 316 SS (Both) Tefzel (Tip)
 Monel (Gap) Hastelloy-C (Gap)
 Teflon (Gap) Hastelloy-B (Gap)
 Kynar (Gap) CPVC (Gap)

11. Process Connection: _____
(size and type)


12. Protection Method: Explosion-proof
 Intrinsic Safety None

13. Agency Approval Required: Yes / No
(circle one)

14. Auto Self-Test (Gap Only): Yes / No
(circle one)

15. Mounting: Integral / Remote;
If Remote, how far: _____
(100ft. maximum)

16. Sensor Length: _____
("A" Dimension)

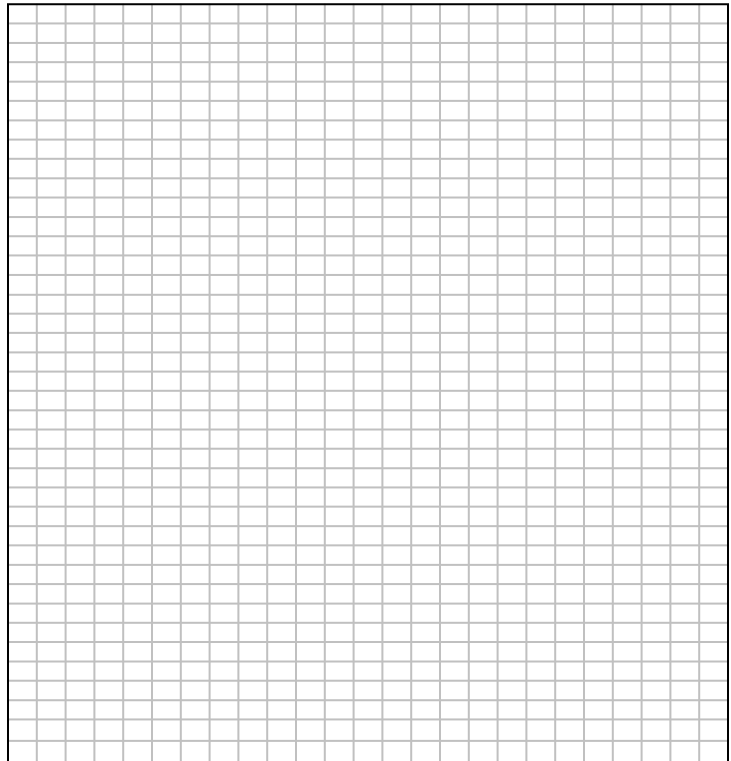

Provide a sketch of the installation if there are any obstructions which may interfere with the switch.

NOTE:
Both sensors require a minimum opening of 59/64" (0.922")

