


SWITCH SPECIFICATIONS:

- SWITCH CONTACT CIRCUITRY: S.P.D.T. LATCHING
- MAXIMUM TEMPERATURE: 221° F (105° C)
- MAXIMUM VOLTAGE: 100 VDC; 140 VAC
- MAXIMUM CURRENT: 0.20 AMPS DC; 0.14 AMPS AC
- MAXIMUM POWER: 4 WATTS DC

***WIRING COLOR CODE:**

- RED (NORMALLY CLOSED)
- WHITE (COMMON)
- BLUE (NORMALLY OPEN)

*REFER TO 75359 FOR 9958 INSTALLATION INSTRUCTIONS AND WIRING COLOR CODE EXPLANATION.

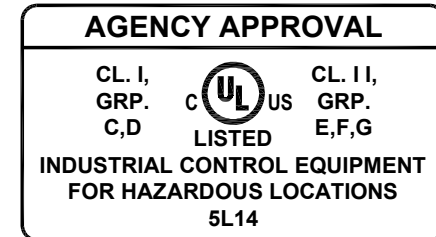

DIMENSIONAL NOTE:
ALL DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE.

INFORMATION IS PROPRIETARY TO KENCO ENGINEERING CO.

| REV. | DATE | BY | CHKD. | ECN | EXPLANATION: |
|------|----------|-----|-------|--------|--|
| A | 07-15-91 | RC | RDM | N/A | 221° F WAS 250° F; 105° C WAS 121° C; 18" LG. WIRE LEADS WERE 10" LG.; ADDED 18 GA.; REMOVED P/N 10001 DECAL |
| B | 04-22-16 | RDM | KLM | 000280 | REDRAWN; ITEM 1 P/N WAS 9966; ITEM 4 P/N WAS 16207; 2-1/4" WAS 1-1/4"; ADDED SHEET 2; SHEET 2 WAS DWG. NO. B-9973; ADDED MTG. CLAMP & PACKAGING TO BILL OF MATERIALS |

| | | |
|---|---------------|----------------|
| KENCO ENGINEERING COMPANY TULSA, OKLAHOMA | | |
| SWITCH, LATCHING (S.P.D.T.) MODEL NO. 9958 FOR KENCO MLG'S | | |
| DATE: 12-01-89 | SHEET: 1 OF 2 | DRAWING NUMBER |
| DRN. BY: ALH | CHKD. BY: RDM | B-9958 |
| SCALE: 1"=1" | REVISION: B | |