

MODEL NO.: KEFS-2-DPDT4-S6-TB

SPECIFICATIONS:


SWITCH RATING: 4A @ 125/250 VAC
5A @ 30 VDC

CONTACT TYPE: DPDT

MINIMUM OPERATING S.G.: .53

MAX. WORKING PRESSURE: 2000 PSI

WETTED MATERIALS: 316 STAINLESS STEEL

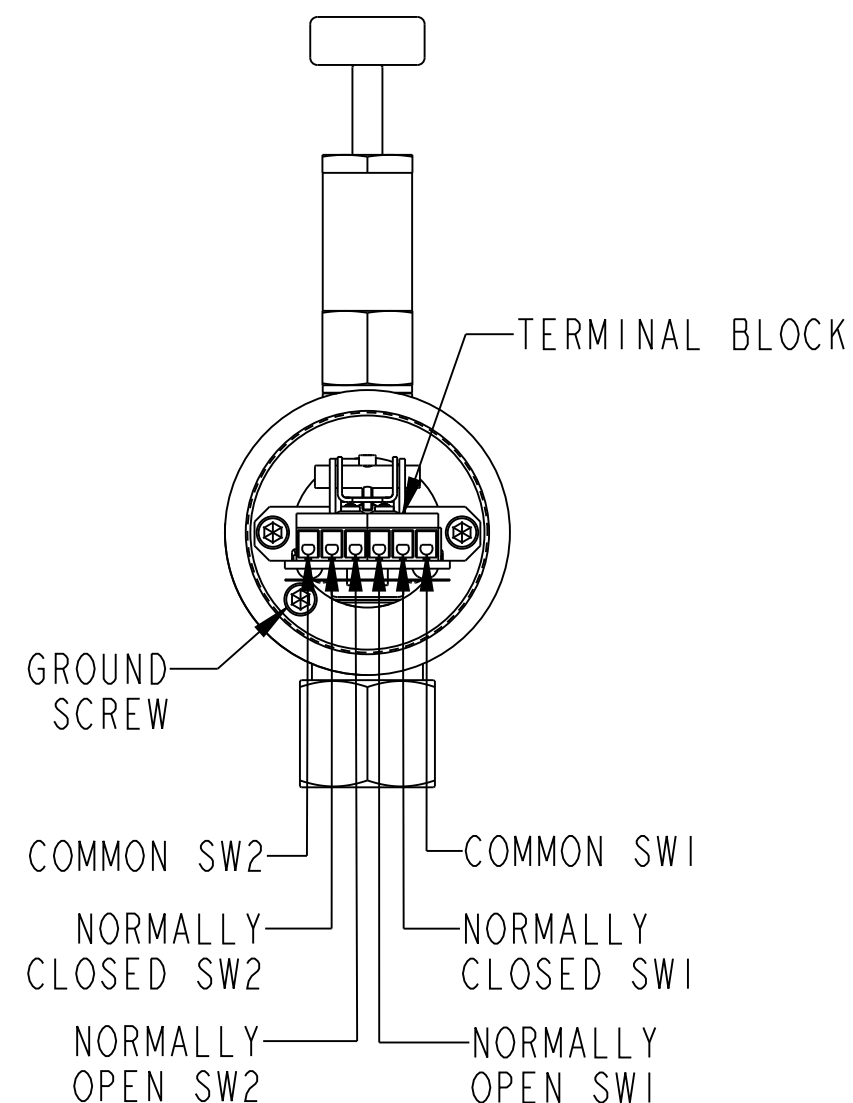

DIMENSIONS ARE FOR REFERENCE ONLY AND ARE
SUBJECT TO CHANGE AT ANYTIME WITHOUT NOTICE.

				DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.		Kenco ENGINEERING Tulsa, Oklahoma USA		MATERIAL:	SEE B/M
A				RELEASED				RELEASE LEVEL:	RELEASED
REV.				DESCRIPTION				DRAWING CREATED IN PRO/ENGINEER	
								TITLE:	
								SWITCH,ELECTRIC FLOAT,2000 PSI, 4A DPDT KEFS-TB 316 S.S.(OUTLINE DRAWING)	
								DRN. BY:	BRC
								SCALE:	0.625
								CHKD. BY:	DS
								REVISION:	A
								DATE:	8/09/21
								SHEET 1 OF 3	
								DRAWING NUMBER	
								88142	

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.

ANGULAR $\pm 1/2^\circ$
FRACTIONAL $\pm 1/64"$
(X.X) $\pm 0.015"$
(X.XX) $\pm 0.010"$
(X.XXX) $\pm 0.005"$
MACH FILLET RAD-.031"
125 MAX. FINISH, ALL
MACHINED SURFACES.