
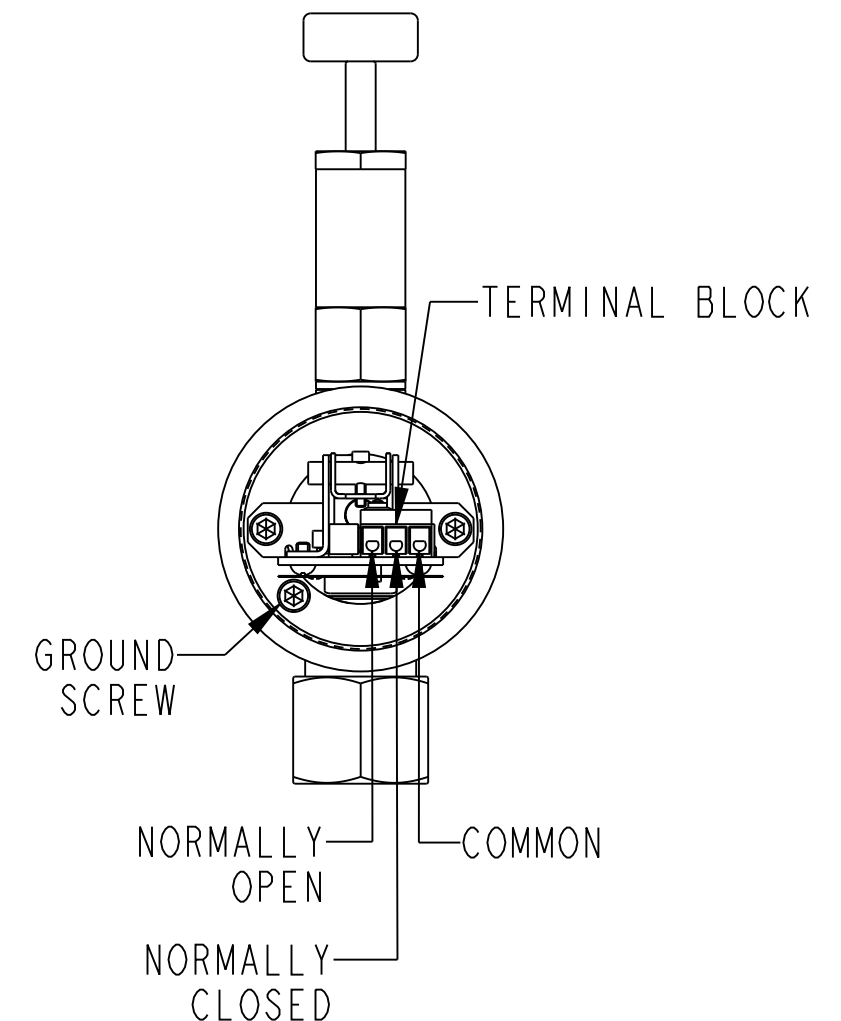


MODEL NO.: KEFS-2-SPDT5-TB

SPECIFICATIONS:

SWITCH RATING: 5A @ 125/250 VAC  
5A @ 30 VDC

CONTACT TYPE: SPDT  
MINIMUM OPERATING S.G.: .53  
MAX. WORKING PRESSURE: 2000 PSI  
WETTED MATERIALS: 303/304 STAINLESS STEEL.

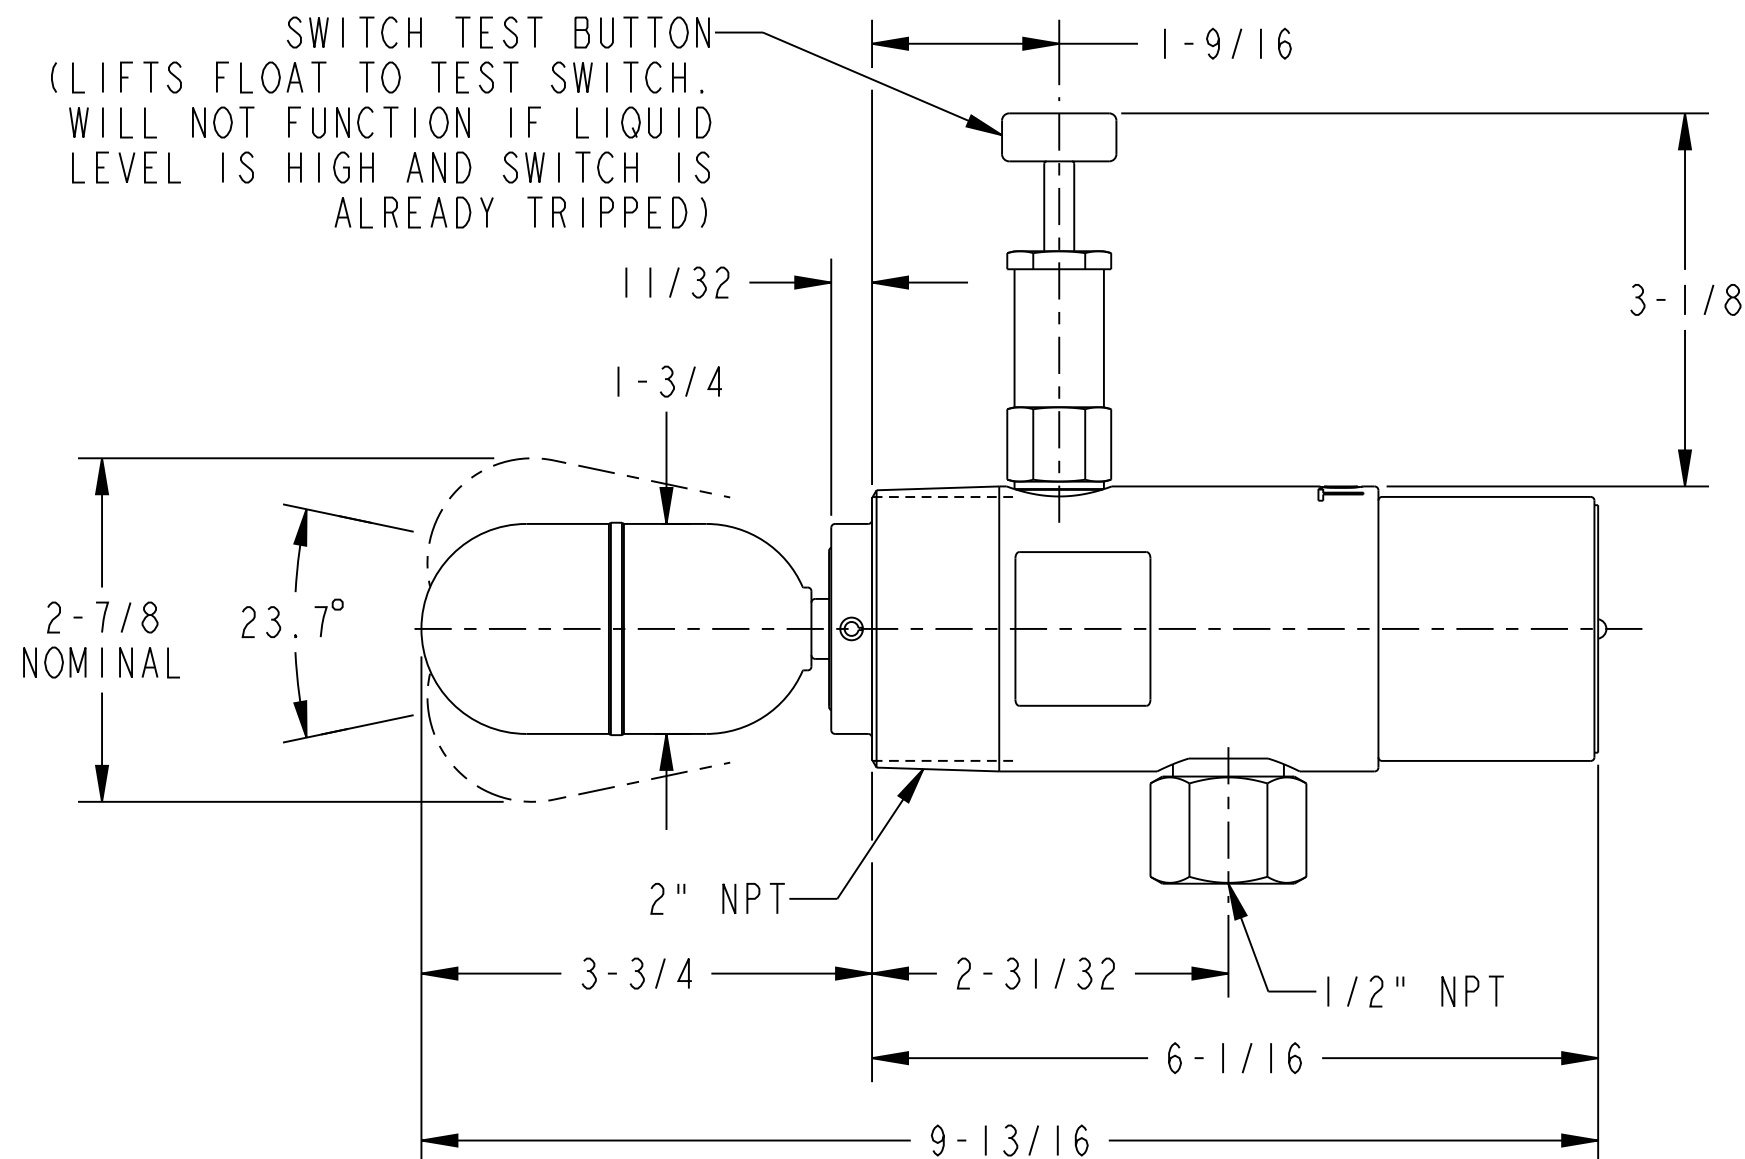

DIMENSIONS ARE FOR REFERENCE ONLY AND ARE  
SUBJECT TO CHANGE AT ANYTIME WITHOUT NOTICE.

				DIM'S IN INCHES		KENCO		MATERIAL:		SEE B/M	
				TOLERANCES UNLESS OTHERWISE SPECIFIED.		ENGINEERING		RELEASE LEVEL:		RELEASED	
						Tulsa, Oklahoma USA		DRAWING CREATED IN PRO/ENGINEER			
A	8/05/21	BRC	RELEASED								
	000314	DS									
REV.	DATE	DRN.	DESCRIPTION								
	ECN	CHKD.									
<b>PROPRIETARY:</b> THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.											
<div></div>						<div></div>					

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.

ANGULAR  $\pm 1/2^\circ$   
FRACTIONAL  $\pm 1/64"$   
(X.X)  $\pm 0.015"$   
(X.XX)  $\pm 0.010"$   
(X.XXX)  $\pm 0.005"$   
MACH FILLET RAD-.031"  
125 MAX. FINISH, ALL  
MACHINED SURFACES.

Kenco ENGINEERING Tulsa, Oklahoma USA		TITLE:	
		SWITCH, ELECTRIC FLOAT, 2000 PSI 5A SPDT KEFS-TB (OUTLINE DRAWING)	
DRN. BY:	BRC	SCALE:	0.625
CHKD. BY:	DS	REVISION:	A
DATE:	08/05/21	SHEET 1 OF 3	DRAWING NUMBER
		87802	