

MODEL NO.: KEFS-2-SPDT8-S6-TB

SPECIFICATIONS:


SWITCH RATING: 8A @ 125/250 VAC
12A @ 125 VAC RESISTIVE

CONTACT TYPE: SPDT

MINIMUM OPERATING S.G.: .53

MAX. WORKING PRESSURE: 2000 PSI

WETTED MATERIALS: 316 STAINLESS STEEL

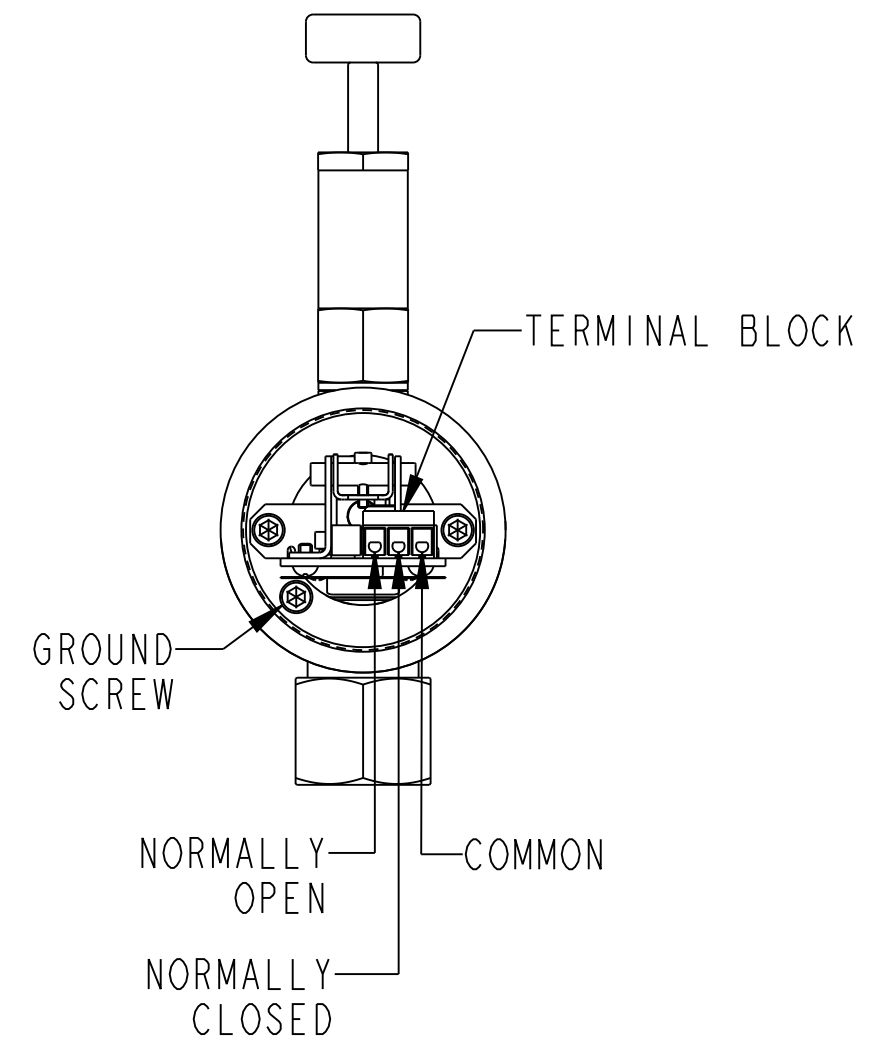

DIMENSIONS ARE FOR REFERENCE ONLY AND ARE SUBJECT TO CHANGE AT ANYTIME WITHOUT NOTICE.

				DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.		Kenco ENGINEERING Tulsa, Oklahoma USA		MATERIAL: SEE B/M	
				RELEASED		TITLE:		RELEASE LEVEL: RELEASED	
				DESCRIPTION		DRAWING CREATED IN PRO/ENGINEER			
REV.	DATE	DRN.	ECN	CHKD.		SWITCH, ELECTRIC FLOAT, 2000 PSI, 8A SPDT KEFS-TB 316 S.S. (OUTLINE DRAWING)		DRAWING NUMBER	
	ECN	CHKD.							
A	08/09/21	BRC	000314	DS		DRN. BY: BRC		SCALE: 0.625	
						CHKD. BY: DS		REVISION: A	
						DATE: 08/09/21		SHEET 1 OF 3	
								88143	

PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.

ANGULAR ±1/2°
FRACTIONAL ±1/64"
(X.X) ±0.015"
(X.XX) ±0.010"
(X.XXX) ±0.005"
MACH FILLET RAD-.031"
125 MAX. FINISH, ALL MACHINED SURFACES.