

MODEL NO.: KEFS-2-SPDT8-TB

SPECIFICATIONS:

SWITCH RATING: 8A @ 125/250 VAC
12A @ 125 VAC RESISTIVE



CONTACT TYPE: SPDT

MINIMUM OPERATING S.G.: .53

MAX. WORKING PRESSURE: 2000 PSI

WETTED MATERIALS: 303/304 STAINLESS STEEL.

SWITCH TEST BUTTON
(LIFTS FLOAT TO TEST SWITCH.
WILL NOT FUNCTION IF LIQUID
LEVEL IS HIGH AND SWITCH IS
ALREADY TRIPPED)

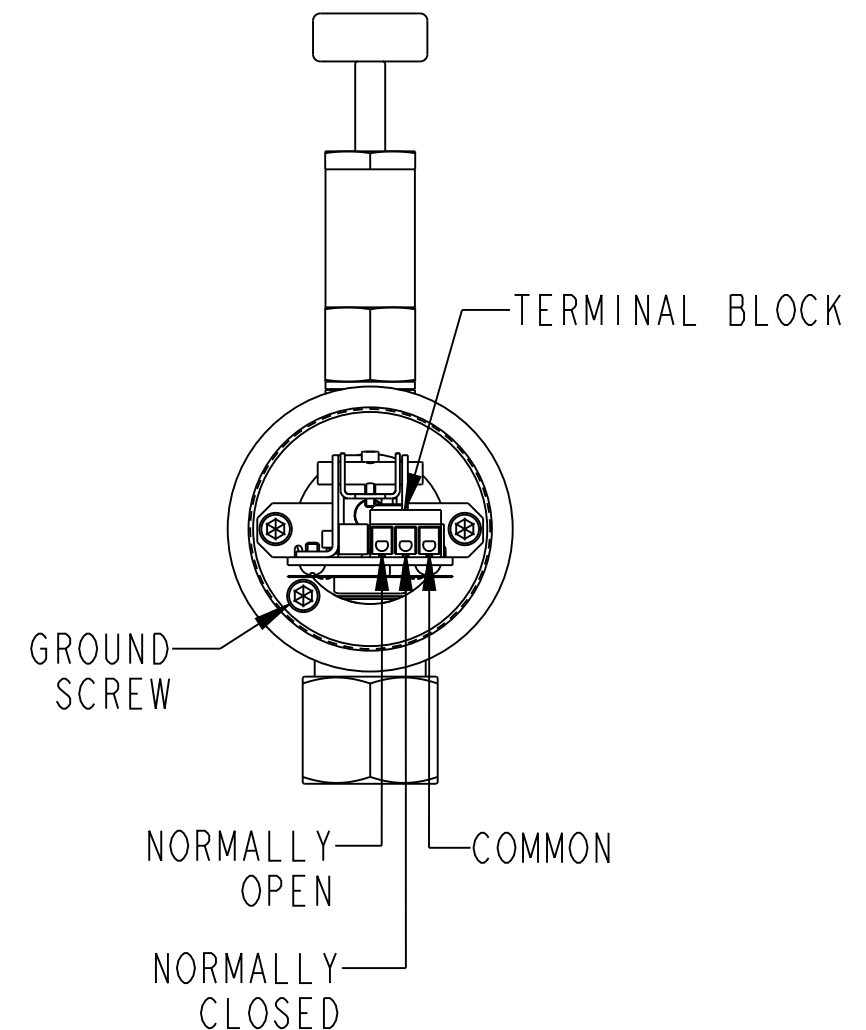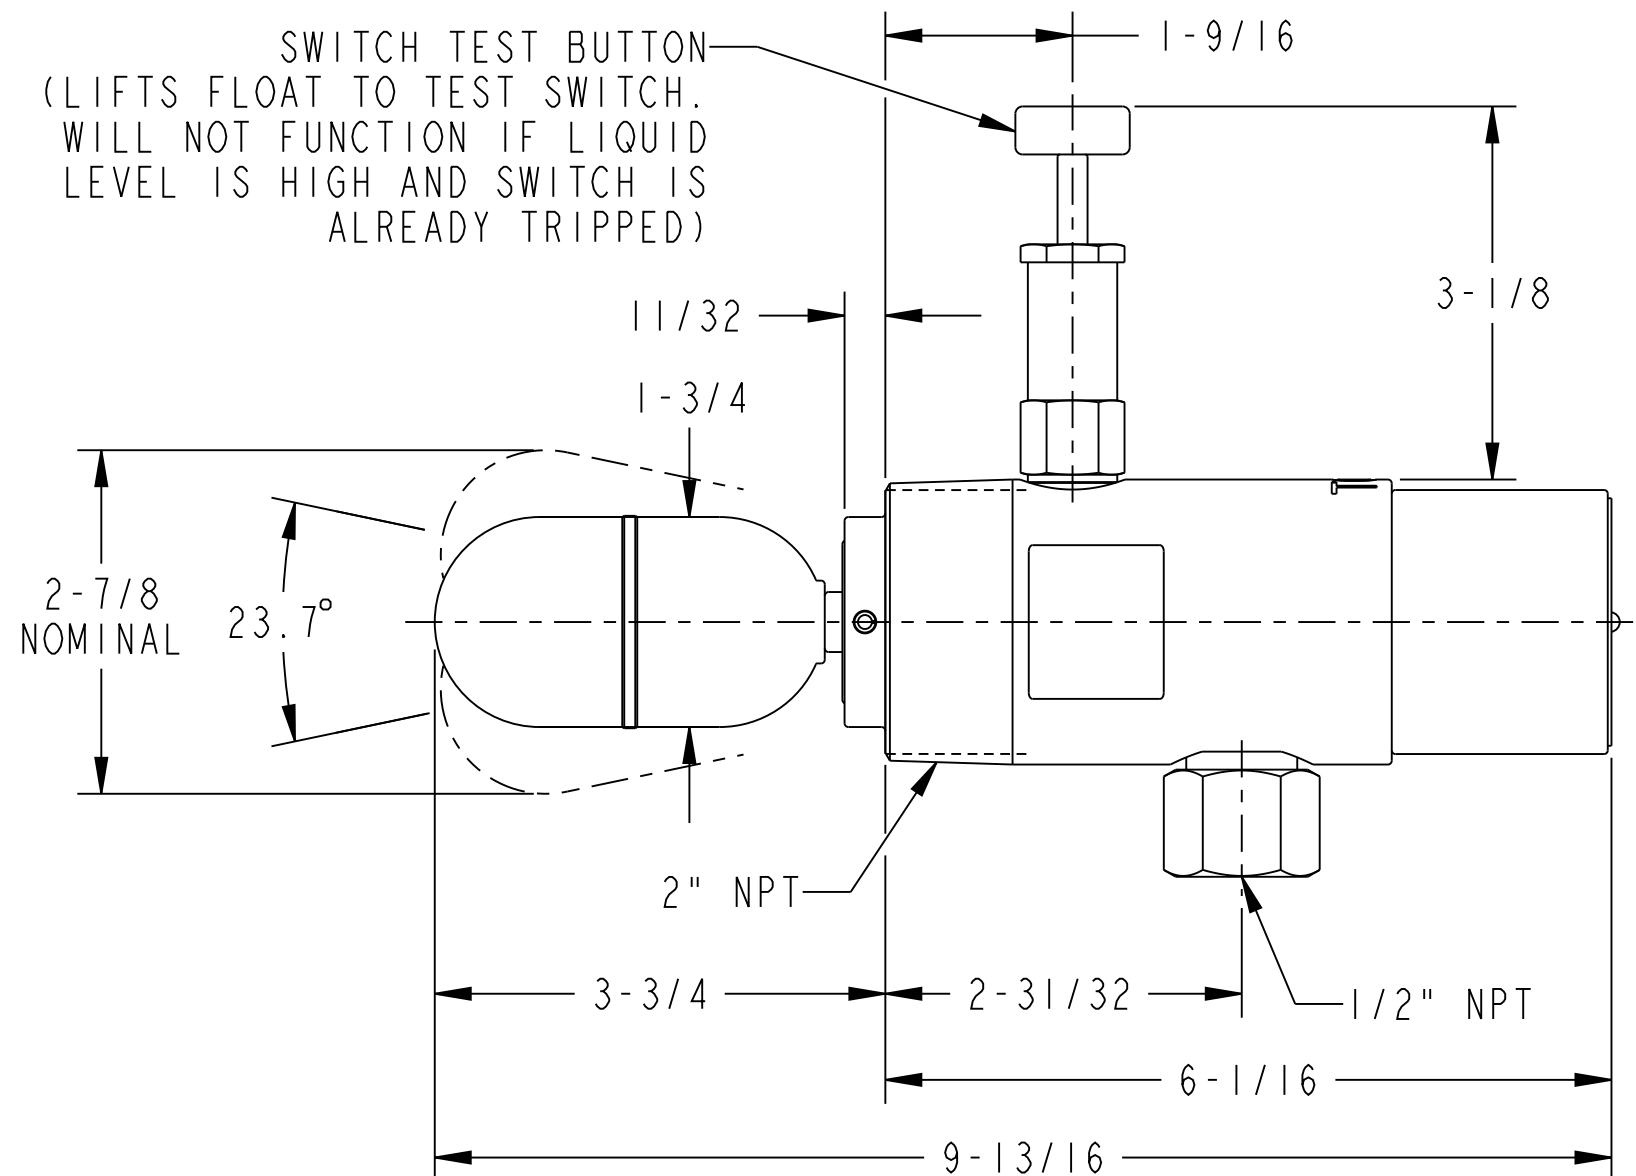

DIMENSIONS ARE FOR REFERENCE ONLY AND ARE
SUBJECT TO CHANGE AT ANYTIME WITHOUT NOTICE.

				DIM'S IN INCHES		<div>KENCO</div>		MATERIAL:		SEE B/M		
				TOLERANCES UNLESS OTHERWISE SPECIFIED.		<div>ENGINEERING</div>		RELEASE LEVEL:		RELEASED		
						Tulsa, Oklahoma USA		DRAWING CREATED IN PRO/ENGINEER				
A	08/06/21	BRC	RELEASED									
	000314	DS										
REV.	DATE	DRN.	DESCRIPTION									
	ECN	CHKD.										
<div>PROPRIETARY:</div> THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.												
				<div>ANGULAR</div> $\pm 1/2^\circ$		<div>SWITCH, ELECTRIC FLOAT, 2000 PSI 8A SPDT KEFS-TB (OUTLINE DRAWING)</div>						
				<div>FRACTIONAL</div> $\pm 1/64"$								
				<div>(X.X)</div> $\pm 0.015"$								
				<div>(X.XX)</div> $\pm 0.010"$								
				<div>(X.XXX)</div> $\pm 0.005"$		DRN. BY:		BRC	SCALE:	0.625	DRAWING NUMBER 88140	
				<div>MACH FILLET RAD-.031"</div>		CHKD. BY:		DS	REVISION:	A		
				<div>125 MAX. FINISH, ALL MACHINED SURFACES.</div>		DATE:		08/06/21	SHEET 1 OF 3			