



FLANGE SHOWN IS ONE OF MANY OPTIONS AVAILABLE AND MAY DIFFER IN APPEARANCE FROM ACTUAL FLANGE USED. THE MODEL NUMBER WILL DETERMINE THE FLANGE.

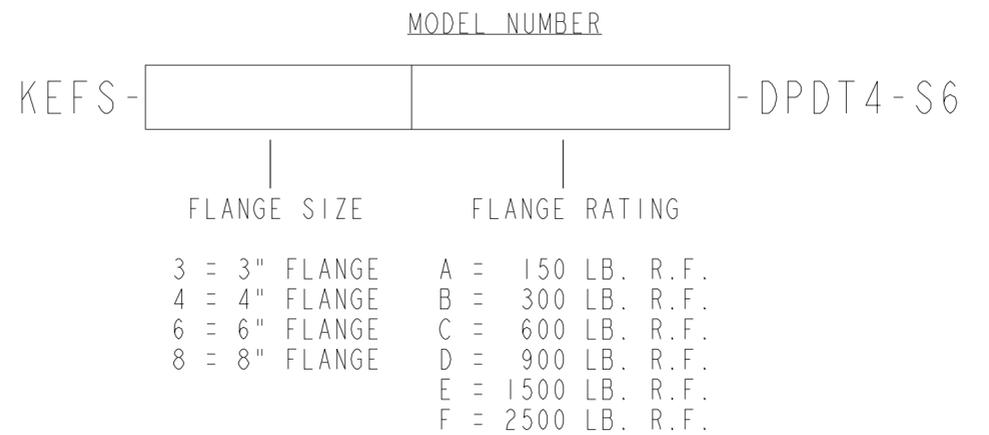

EXAMPLE: THE MODEL NUMBER FOR A FLANGED KEFS WITH A 4" 300 LB. R.F. 316 S.S. FLANGE WOULD BE "KEFS-4B-DPDT4-S6"

SPECIFICATIONS:

SWITCH RATING:	4A @ 125/250 VAC, 5A @ 30 VDC
CONTACT TYPE:	DPDT
MINIMUM OPERATING S.G.:	.53
MAX. WORKING PRESSURE:	FULL VACUUM TO FLANGE RATING (2000 PSI MAX)
WETTED MATERIALS:	316 S.S.
FLANGE MATERIAL:	316 S.S.

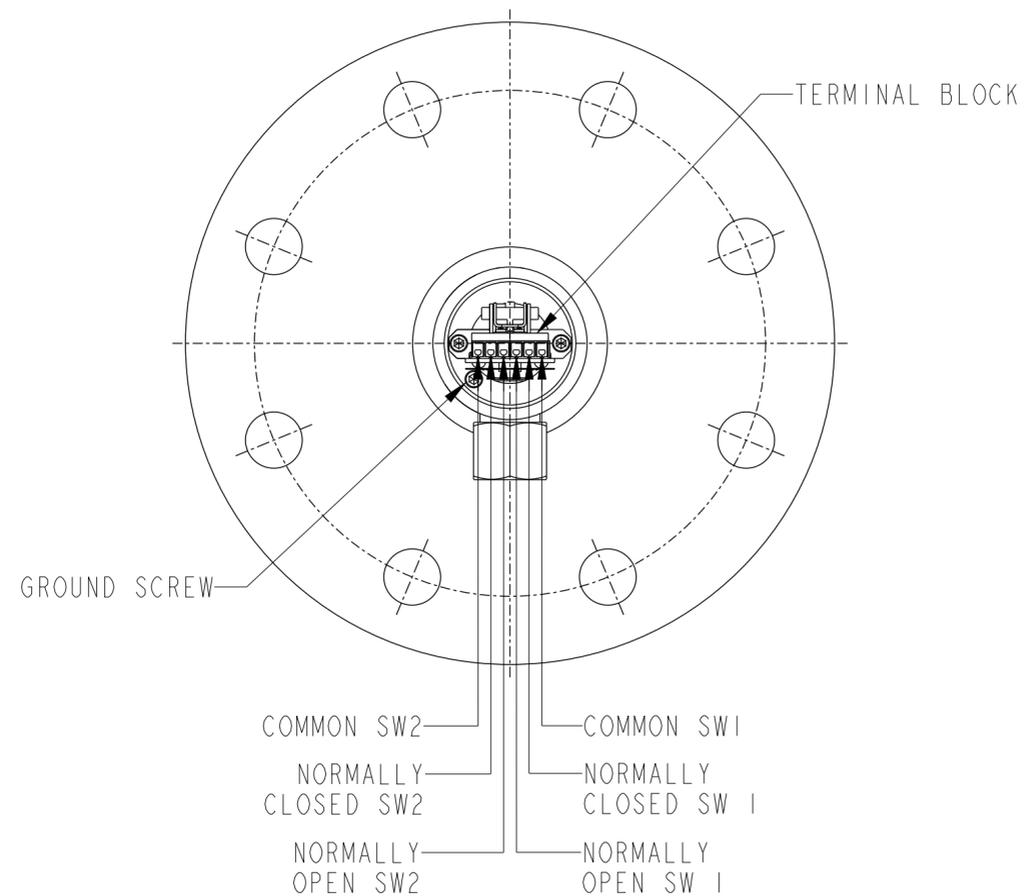

			DIM'S IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED.		 Tulsa, Oklahoma, USA	MATERIAL:			
RELEASED			ANGULAR ±1/2° FRACTIONAL ±1/64" (X.X) ±0.015" (X.XX) ±0.010" (X.XXX) ±0.005" MACH FILLET RND. .031" 125 MAX. FINISH, ALL MACHINED SURFACES.			ENGINEERING	RELEASE LEVEL: RELEASED	DRAWING CREATED IN PRO/ENGINEER	
A	8/02/24	BRC	DESCRIPTION		TITLE:	SWITCH, ELECTRIC FLOAT, 2000 PSI 4A DPDT FLANGED KEFS (OUTLINE DRAWING)			
REV.	DATE	DRN.			DRN. BY:	BRC	SCALE:	0.500	DRAWING NUMBER
	ECN	CHKD.			CHKD. BY:	DS	REVISION:	A	
<small>PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.</small>					DATE:	8/02/24	SHEET 1 OF 3	94661	