


## FLANGED KSF SIGHT FLOWS

Flanged models conform to standard ANSI mounting dimensions. All models have 150 lb. raised face flanges. Sizes range from 1" to 12".

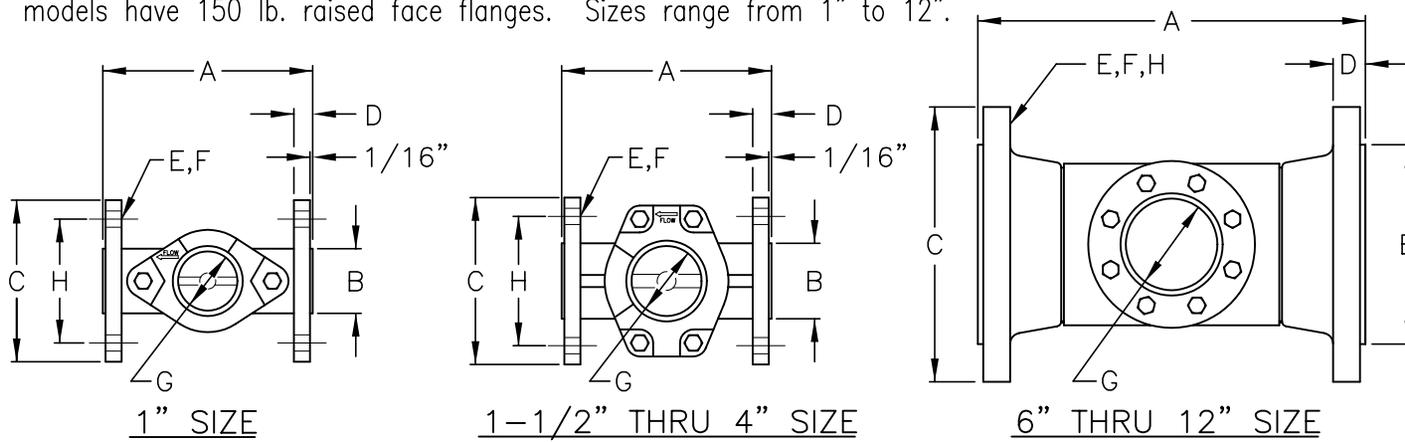

### DIMENSIONS FOR FLANGED SIGHT FLOWS

Flange Size	1"	1-1/2"	2"	3"	4"	6"	8"	10"	12"
A Overall Length	5	6-1/2	7	8	9	14-1/4	16-1/8	16-1/8	17-1/8
B Raised Face Diameter	2	2-7/8	3-5/8	5	6-3/16	8-1/2	10-5/8	12-3/4	15
C Flange Diameter	4-1/4	5	6	7-1/2	9	11	13-1/2	16	19
D Flange Thickness	15/32	19/32	11/16	13/16	1	1	1-1/8	1-3/16	1-1/4
E Number of Bolt Holes	4	4	4	4	8	8	8	12	12
F Bolt Hole Diameter	5/8	5/8	3/4	3/4	3/4	3/4	3/4	7/8	7/8
G Sight Opening Diameter	1-1/2	2	2	3	3	4	4	4	4
H Bolt Circle Diameter	3-1/8	3-7/8	4-3/4	6	7-1/2	9-1/2	11-3/4	14-1/4	17
Total Weight in Pounds	5.4	11.1	15.0	29.3	35.0	85.0	125.0	165.0	250.0

DIMENSION ARE FOR REFERENCE PURPOSES ONLY AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE.

COPYRIGHT © 2003-KENCO INTERNATIONAL, INC.-ALL RIGHTS RESERVED

REV.	DATE	BY	CHKD.	EXPLANATION:

**KENCO ENGINEERING COMPANY**  
TULSA, OKLAHOMA

INDICATOR, SIGHT FLOW

DATE: 06-12-96	SHEET: 1 OF 1	DRAWING NUMBER
DRN. BY:	CHKD. BY:	KSF-F
SCALE: NONE	REVISION:	