

RELIEF PRESSURE ADJUSTMENT RANGE: 0 TO 150 PSI

RELIEF PRESSURE FACTORY SETTING: 50 PSI

WETTED MATERIALS:

BODY: PVC

DIAPHRAGM: TEFLON (WETTED)/EPDM (NON-WETTED)

NON-WETTED MATERIALS:

SPRING CASE: PVC


RELIEF PRESSURE ADJUSTING SCREW: PVC

SPRING: ZINC PLATED SPRING STEEL

NUTS, BOLTS & WASHERS: 18-8 STAINLESS STEEL

MODEL NUMBER:

KBPV-T-75-P-P-TE (THREADED CONNECTIONS)
KBPV-S-75-P-P-TE (SOCKET WELD CONNECTIONS)

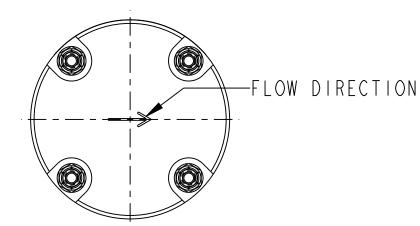

		5/20/15	LR	REVISED TO SHOW CHANGE TO LABEL	DIM'S IN INCHES	\square	$\overline{)}$	MATERIA	L:	SEE B/M
	D	N/A	BRC		TOLERANCES UNLESS OTHERWISE SPECIFIED.	\Box		RELEASE	LEVEL:	RELEASED
	٨	5/06/15	BRC	RELEASED	ANGULAR ±1/2°		EERIN C	DRAWIN	G CREATED) IN PRO/ENGINEER
	А	N/A	KLM		FRACTIONAL ±1/64"	TITLE:				
R	REV.	DATE	DRN.	DESCRIPTION	(X.X) ±0.015" VALVE, KBPV RELIEF, 3/4", BOLTED					
	NEV.	ECN	CHKD.		(X.XXX) ±0.005"	DRN. BY:	BRC	SCALE:	0.600	DRAWING NUMBER
	PRO	PRIETARY:	THIS DRAV	VING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO	MACH FILLET RAD031" 125 MAX. FINISH, ALL	CHKD. BY:	KLM	REVISION:	В	73456
		GINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED REMAINDED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.			MACHINED SURFACES.	DATE: 5/06/15		SHEET I OF 3		13436