



KPRV AND KBPV CHEMICAL FEED PUMP RELIEF VALVES

OVERVIEW

The KENCO KBPV Back Pressure Valves are two-way relief valves designed to keep a constant pressure in the discharge lines of a chemical feed pump system. Constant pressure on the discharge side of the chemical feed (metering) pump prevents siphoning, ensuring proper operation of the pump and an accurate chemical dosage rate. KENCO KPRV Pressure Relief Valves are similar in design to KBPV Valves but are three-way valves that allow unrestricted flow through two ports and a third relief port designed to be connected back to tank. This configuration provides protection from over pressurization of the chemical feed systems lines and components by relieving the system pressure back to tank through the third port when the system pressure exceeds the KPRV's set pressure.




KPRV AND KBPV FEATURES

- Relief pressure (Factory set to 50 psi) can be field adjusted from 15 psi to 150 psi.
- ¼", ½", ¾" and 1" port sizes available in either female NPT threads or socket weld connections.
- PVC and wetted 316 stainless steel materials available.
- Long life PTFE Lined EPDM Diaphragm



KPRV/KBPV SPECIFICATIONS

SIZE	MAX FLOW RATE @ 150 PSI AND SET PRESSURE = 50 PSI		DIMENSIONS (INCHES)		
	PULSATING	CONTINUOUS	A	B	C
1/4"	200 USGPH	10 USGPM	3.53	0.75	2.34
1/2"	325 USGPH	17 USGPM	5.88	1.25	3.46
3/4"	365 USGPH	19 USGPM	5.88	1.25	3.46
1"	465 USGPH	24 USGPM	5.88	1.25	3.46
CONNECTION TYPES			NPT, SOCKET WELD		
CONNECTION SIZES			1/4", 1/2", 3/4", 1"		
BODY MATERIAL			PVC, 316 SS		
SPRING CASE MATERIAL			PVC		
DIAPHRAGM MATERIAL			TEFLON LINED EPDM		
PRESSURE ADJUSTMENT RANGE			15-150 PSI		
MAXIMUM TEMPERATURE			140° F		
MAXIMUM OPERATING PRESSURE			375 PSI @ 70° F		

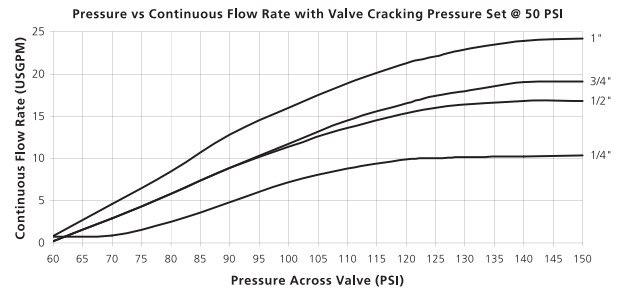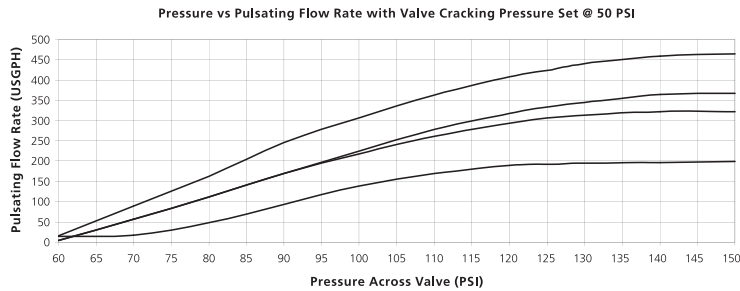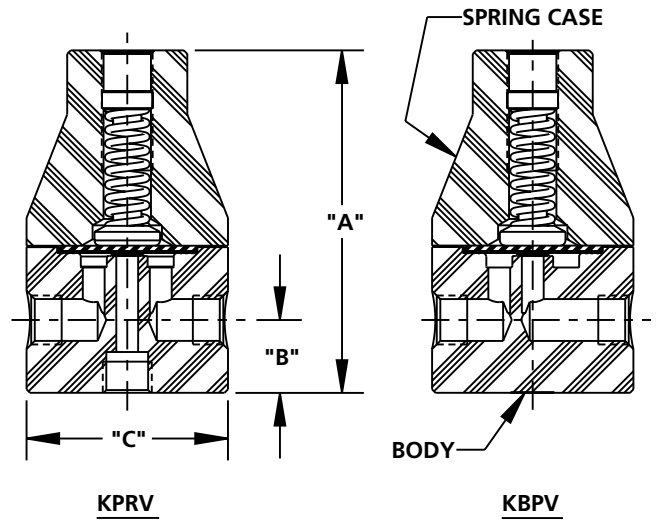

ORDERING GUIDE

Valve Type:

KPRV = Pressure Relief Valve
KBPV = Back Pressure Valve

Connection Type:

T = NPT (Female)
S = Socket Weld

Connection Size:

25 = 1/4"
50 = 1/2"
75 = 3/4"
10 = 1"

Body Material (Wetted):

P = PVC
S6 = 316 Stainless Steel

Spring Case Material (Non-Wetted):

P = PVC

Diaphragm Material:

TE = PTFE (wetted) / EPDM (non-wetted)

Note: Other materials available upon request.

Represented by:

Kenco Sales Offices:

Headquarters

10001 E. 54th St.
Tulsa, OK 74146
phone 918.663.4406
fax 918.663.4480
www.kenco-eng.com
email: info@kenco-eng.com

Baton Rouge Office

11616 Industriplex, Suite 7
Baton Rouge, LA 70809
phone 225.755.1912
fax 225.755.1913
www.kenco-eng.com
email: kenco-la@kenco-eng.com

80224 (02-02-21)

